

Canvacon 5000E


A premium quality woven polyethylene (PE) based polyfabric designed for a wide range of industrial and agricultural liners, covers and temporary shelters.

Canvacon 5000E

UV Stabilised HDPE (Heavy Duty Polyethylene)			
Weight	260 gsm		
Roll Width	205 cm		
Roll Length	50 mt		
SPECIFICATIONS			
Coating	UV Stabilised LDPE		
Coating Thickness	60 μ m		
Temperature Range	-30°C to +70°C		
Tensile Strength	Warp 1526 N/50mm Weft 1298 N/50mm		
Wing Tear	Warp 319 N Weft 290 N		
Elongation at Break %	Warp 24 % Weft 21.5 %		
Burst Strength	3100 kPa		
Hydrostatic Pressure	250 kPa		
Flammability	Flammability Index	32	Range 0 - 100

The above results are typical averages from quality assurance testing and are not to be taken as a minimum specification

Canvacon 5000E Colour Range

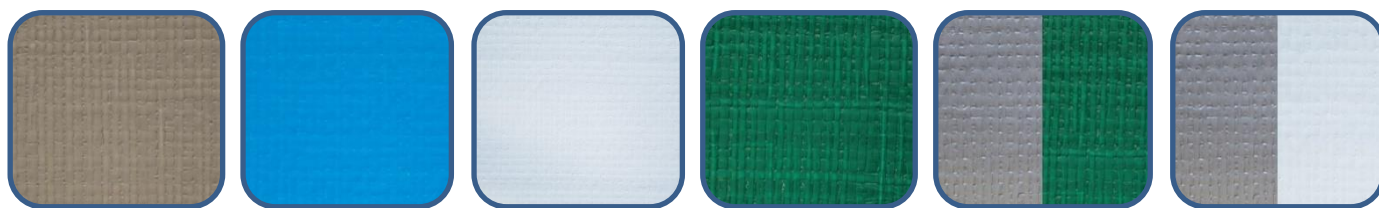

Beige

Blue

White

Green

Silver/Green

Silver/White

Colours are a representation and may differ from the actual colours

Dirt repellent PE coating provides good appearance, reduced maintenance processing and costs

Canvacon® provides strong watertight seams and offers a durable, long-lasting barrier against moisture in many applications

High levels of coating adhesion for improved weld strength and ease of welding.

UV Stabilised Coating & UV Stabilised Basecloth for long service life.

100% recyclable for environmentally friendly disposal

Head Office - Victoria

9A Lakewood Blvd,
BRAESIDE VIC 3195
P: 03 9588 8800

E: paskal@paskal.com.au

Queensland

4 Aranda St,
SLACKS CREEK QLD 4127
P: 07 3440 7000

E: qld@paskal.com.au

Western Australia

14B Port Kembla Dve,
BIBRA LAKE WA 6163
P: 08 9236 3400

E: wa@paskal.com.au

Tasmania

HOBART TAS 7000
P: 03 6295 2100

E: tas@paskal.com.au