

PK610 Multicover

PK610 Multicover is a versatile fabric which is ideal for general-purpose coverage and protection. It has a flat matte surface and a soft formulation to allow easy handling & processing during fabrication whilst offering a non-reflective and non-slip finish to the final product.

PVC Coated Polyester Fabric			
Weight	610 gsm		
Roll Width	205cm & 320cm		
Roll Length	30 metres		
SPECIFICATIONS			
PROPERTIES	TEST METHOD	RESULT	UNIT
Yarn (W/F)	DIN EN ISO 2060	1000/1300 1100/1430	Denier Dtex
Threads (W/F)	DIN EN ISO 1049-2	18/17 7/7	Per inch Per cm
Tensile Strength (W/F)	DIN 53354	291/285 2851.8/2793 325/318	Kg / 5cm N / 5cm Lbs / inch
Tear Resistance (W/F)	DIN 53363	36/38 352.8/372 79/84	Kg N Lbs
Welding Adhesion	DIN 53357	10.2 100.0 11.4	Kg / 5cm N / 5cm Lbs / inch
Temperature Resistance	DIN 53361	-30 ~ +70	°C
Flex Cracking Resistance	AS 1441.6 - 1973	400,000	Cycles
Additives	UV, Anti Crack to -30°, Anti-Static, FR treatment to AS 2755.2		
Environmental	Meets ROHS, REACH & VCA requirements		
Surface	Matte		

PK610 Multicover Colour Range



Colours are a representation and may differ from the actual colours

Head Office - Victoria

9A Lakewood Blvd,
BRAESIDE VIC 3195
P: 03 9588 8800
E: paskal@paskal.com.au

Queensland

4 Aranda St,
SLACKS CREEK QLD 4127
P: 07 3440 7000
E: qld@paskal.com.au

Western Australia


14B Port Kembla Dve,
BIBRA LAKE WA 6163
P: 08 9236 3400
E: wa@paskal.com.au

Tasmania

HOBART TAS 7000
P: 03 6295 2100
E: tas@paskal.com.au

PK610 Multicover

Further information

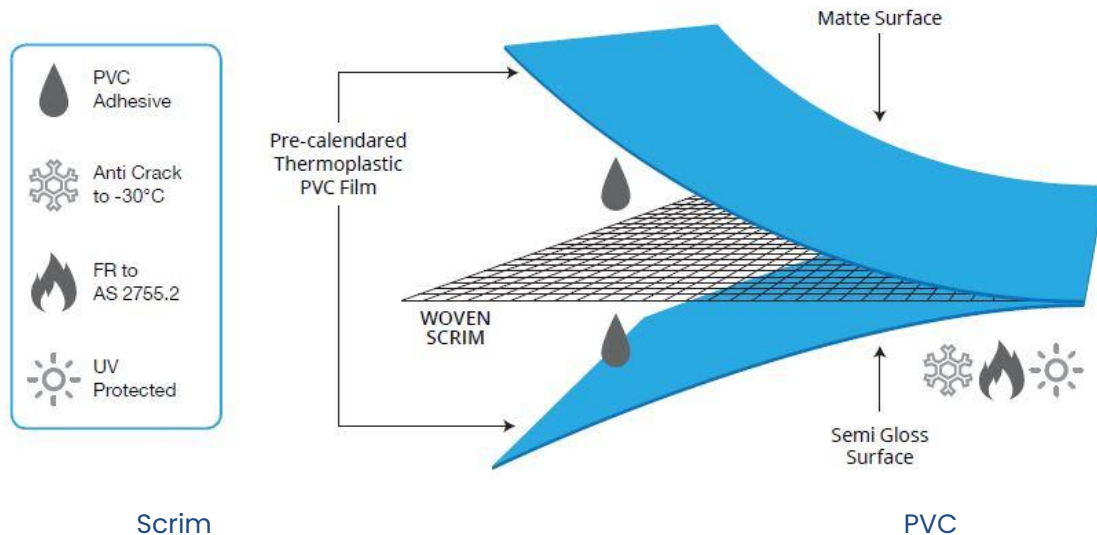

Scrim

PK610 Multicover uses a superior, high-tensile, woven polyester yarn sourced specially to meet our requirements for better shrinkage-resistance and strength than is typically found in this type of product. Its woven construction produces a high 1000 x 1300 denier with an (18 x 17) density which offers higher tensile and tearing strength than many other general cover products in the market.

Manufacture

PK610 Multicover is a semi-coated product, providing you with a premium product option in this category, without the high price tag.

Semi-coated manufacture results in excellent bond strength between the scrim and PVC, with minimal degradation to scrim strength after coating, and offers extended flex resistance up to 400,000 cycles and, therefore, a longer product life in application.

PVC

The coated PVC quality meets our best practice and VCA commitments and TAYA's standard of 100% RoHS and REACH compliance. Only the highest quality virgin grade PVC resins, DiNP plasticisers, UV absorbers (to maximum concentration), cold crack & flame-retardant additives to AS 2755.2 are used.

Performance

PK610 Multicover offers consistently good welding performance using any hot air, hot wedge and high frequency methods, reducing your costs by allowing faster production times with less waste or rejects and ensuring greater performance reliability in application.

Warranty

A 5-year limited warranty on colour fading, cracking (polymer breakdown) and delamination is offered.

There is a reduced warranty of 1-2 years for colour fastness on bright colours, especially those including a red pigment.

Please check with us at the time of product selection.

Head Office - Victoria

9A Lakewood Blvd,
BRAESIDE VIC 3195
P: 03 9588 8800
E: paskal@paskal.com.au

Queensland

4 Aranda St,
SLACKS CREEK QLD 4127
P: 07 3440 7000
E: qld@paskal.com.au

Western Australia

14B Port Kembla Dve,
BIBRA LAKE WA 6163
P: 08 9236 3400
E: wa@paskal.com.au

Tasmania

HOBART TAS 7000
P: 03 6295 2100
E: tas@paskal.com.au